


## CUBE HYPER light tower

The special **CUBE HYPER** version by Generac Mobile® is a lighting tower equipped with the new **Hyper® LED Technology** allowing the operator to point the floodlights in every direction, to provide 360° illumination. Also available with anti-glare floodlights.

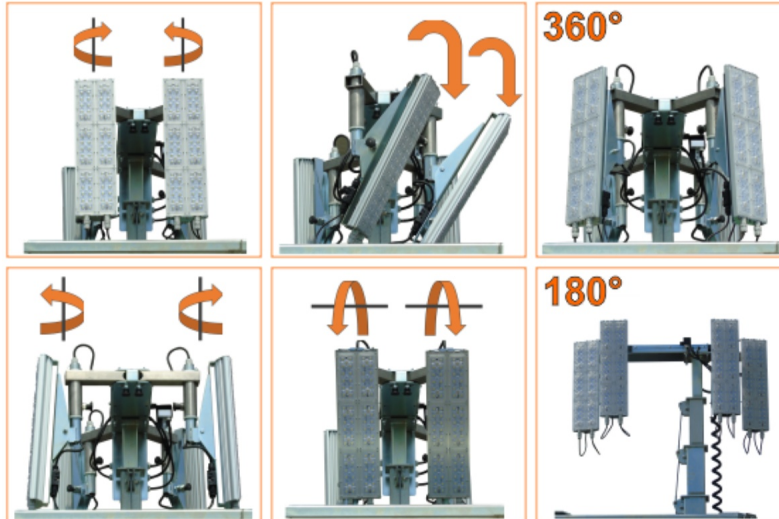

Picture shown may not reflect actual configuration.

### Digital controller

The CUBE Hyper is equipped with a **digital controller** specifically studied to manage every function of the light tower for the best ease of use.

### Top accessibility

**5 wide doors for complete access** to the technical area.

### Bolted frame

A **bolted frame** for a much better resistance to vibrations, wear, and rust. It offers the best reliability and durability in the industry.

### Liquid containment tank

A **liquid containment tank** to avoid any risk of leakages on the ground.

### Safe locking stabilizers

New adjustable **locking system** embedded in the machine frame. A step forward from competition standard locking system. No more removable external lockers: when CUBE HYPER doors are locked, it's impossible to change position or even remove the stabilizers.

CUBE Hyper K2	Technical Data
Minimum dimensions (L x W x H)	1230 x 1160 x 2405 mm
Maximum dimensions (L x W x H)	1790 x 1735 x 8400 mm
Dry weight	1070 kg
Lifting system	Hydraulic
Mast rotation	340°
Lamps power	4 x 320 W
Lamps type	LED (Hyper)
Total lumen	184000 Lm
Illuminated area	4500 m <sup>2</sup>
Engine	Kubota Z482
Engine cooling	Liquid
Cylinders (q.ty)	2
Engine speed (50/60 Hz)	1500 / 1800 rpm
Liquid containment (110%)	√
Alternator (kVA/V/Hz)	3.5/230/50 – 4.2/240/60
Outlet socket (kVA/V/Hz)	2/230/50 – 2/240/60
Inlet plug (A/V/Hz)	16/230/50 – 16/240/60
Avg. sound pressure	58 dB(A) @ 7m
Wind speed resistance	110 km/h
Tank capacity	170 l
Running time	243 h



Picture shown may not reflect actual configuration.